



Upute za korištenje OT Cloud Fax usluge
putem „Windows 10 Mail“ e-mail klijenta

OT Cloud Fax - Podešavanje "Windows 10 mail" e-mail klijenta


1. Pokrenite "Windows 10 Mail" e-mail klijent odabirom iz "Start" izbornika Windows 10 operativnog sustava.

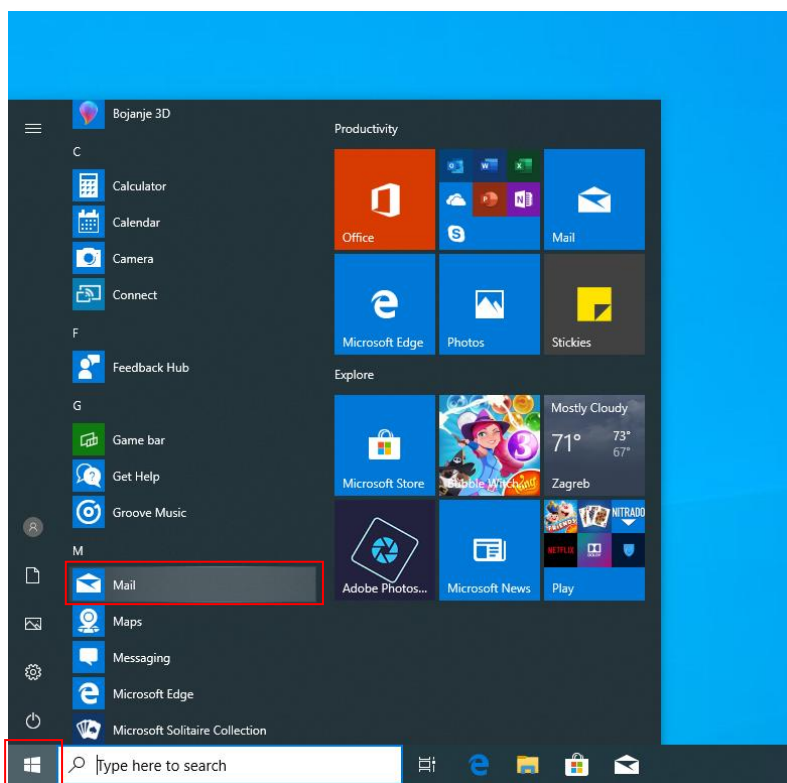


2. Pri prvom pokretanju potrebno je postaviti „Windows 10 Mail“ e-mail klijent za upotrebu s OT Cloud Fax uslugom. Odaberite ikonu „Postavke“.

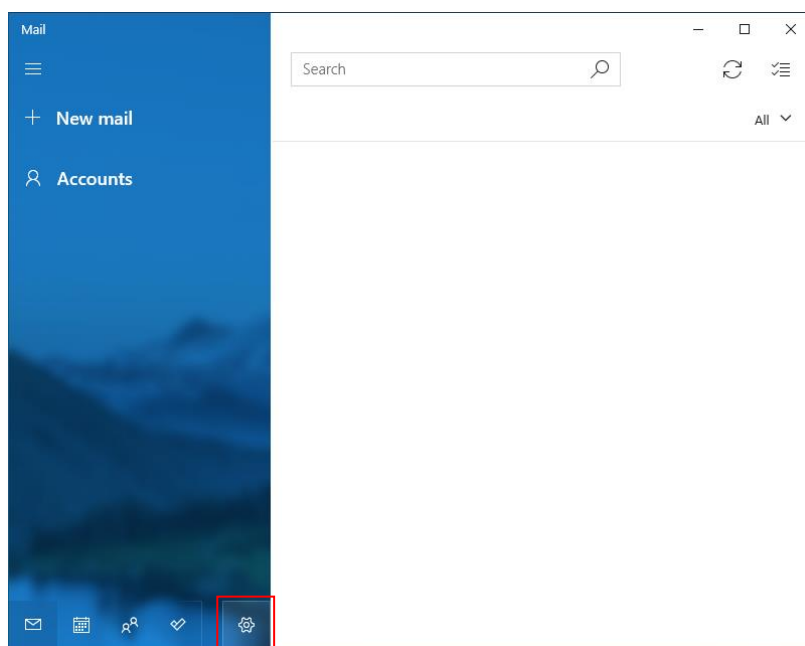


3. Odaberite stavku „Manage accounts“.

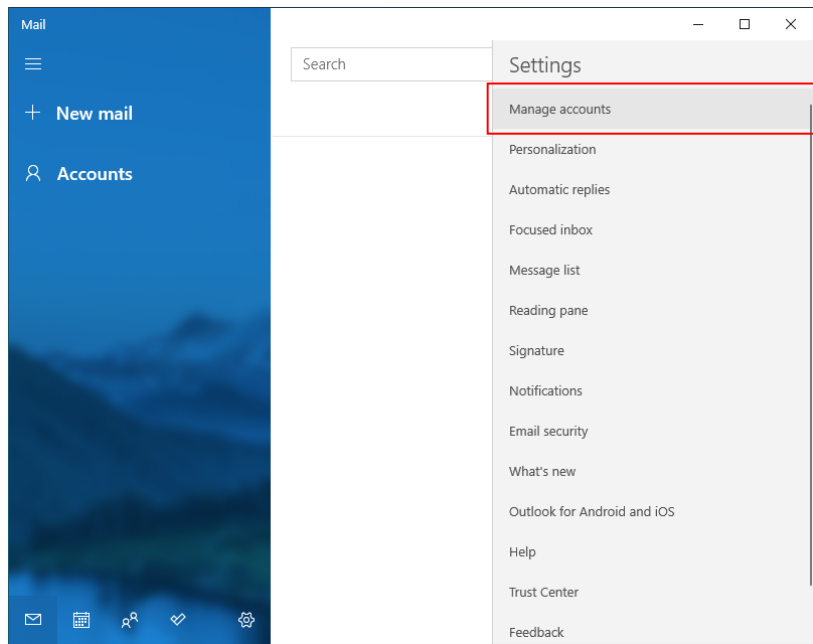


4. Odaberite stavku „Add account“.

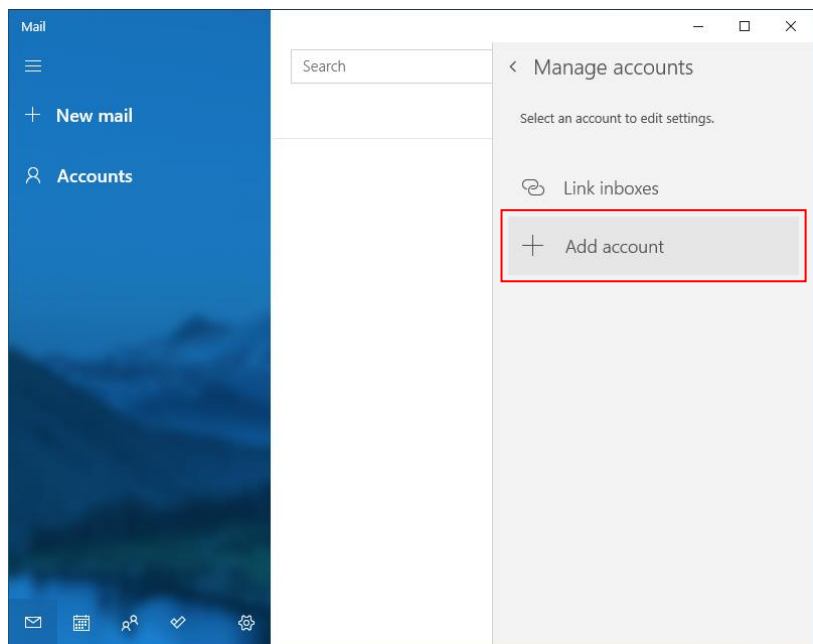

5. Odaberite stavku „Advanced setup“.

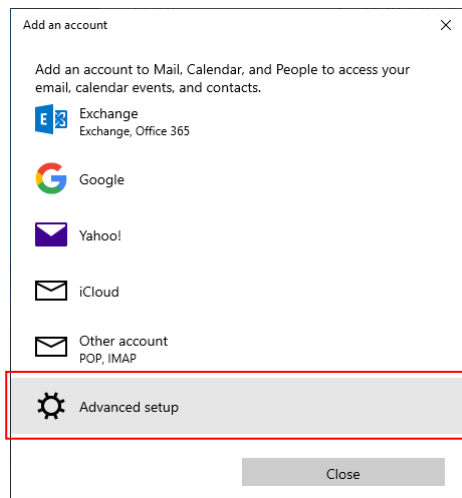

6. Odaberite stavku „Internet email“.

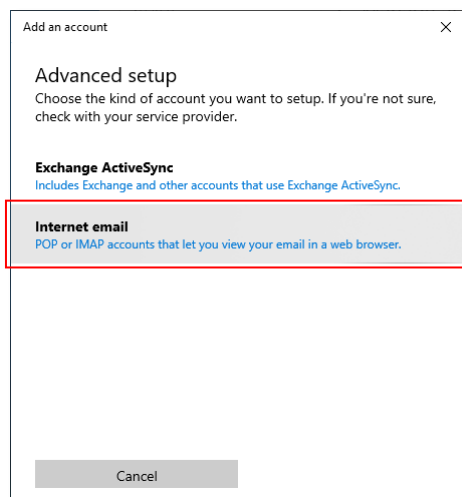

7. Pod karticom „Add an account“ upišite Vaše podatke za pristup OT Cloud Fax usluzi koje ste dobili od strane Optima Telekoma. U polje „Email address“ upišite Vašu OT Cloud Fax e-mail adresu. U polje „User name“ upišite Vaše OT Cloud Fax korisničko ime. U polje „Password“ upišite Vašu OT Cloud Fax lozinku/zaporku. U polje „Account name“ upišite željeni naziv OT Cloud Fax servisa. Nastavite s unosom preostalih stavki „scrollajući“ mišem prema poljima niže...

Add an account

Internet email account

Email address
pero.peric@optinet.hr

User name
pperic@optinet
Examples: kevinc, kevinc@contoso.com, domain\kevinc

Password
••••••••

Account name
OT Cloud Fax

Cancel Sign in

8. U polje „Send your messages using this name“ upišite željeno ime. U polje „Incoming email server“ upišite **pop.optinet.hr**. U polju „Account type“ odaberite stavku **POP3**. U polje „Outgoing (SMTP) email server“ upišite **fax.optinet.hr:25:1**.

Add an account

Internet email account

Send your messages using this name
Pero Perić

Incoming email server
pop.optinet.hr

Account type
POP3

Outgoing (SMTP) email server
fax.optinet.hr:25:1

Outgoing server requires authentication

Cancel Sign in

9. Sve kućice (checkbox-ove) ostavite označenima. Odaberite stavku „Sign in“.

Add an account

Internet email account

Account type
POP3

Outgoing (SMTP) email server
fax.optinet.hr:25:1

- Outgoing server requires authentication
- Use the same user name and password for sending email
- Require SSL for incoming email
- Require SSL for outgoing email

Cancel Sign in

10. Uspješno ste postavili „Windows 10 Mail“ e-mail klijent za korištenje OT Cloud Fax usluge. Odaberite stavku „Done“.


Add an account

All done!
Your account was set up successfully.


pero.peric@optinet.hr

Done


11. Odaberite stavku „New mail“ za pokretanje aktivnosti slanja nove OT Cloud Fax poruke.

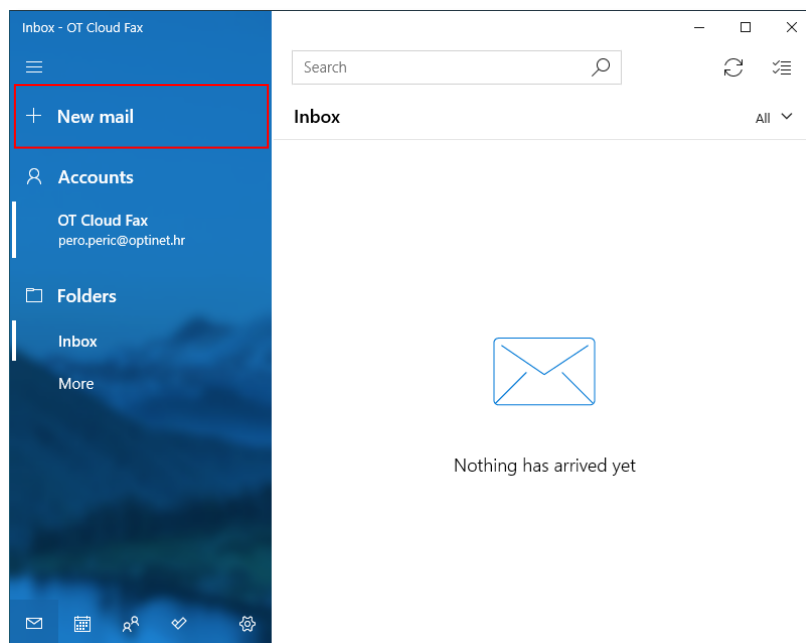


12. U polje „To“ upišite željeni telefonski broj na koji želite poslati OT Cloud Fax poruku. Broj telefona unesite u internacionalnom formatu uz dodatak/nastavak **@fax.optinet.hr** (npr: **38515492019@fax.optinet.hr**). U polje „Subject“ upišite željeni naslov OT Cloud Fax poruke, a niže sadržaj teksta OT Cloud Fax poruke. Za slanje OT Cloud Fax poruke, odaberite stavku „Send“.

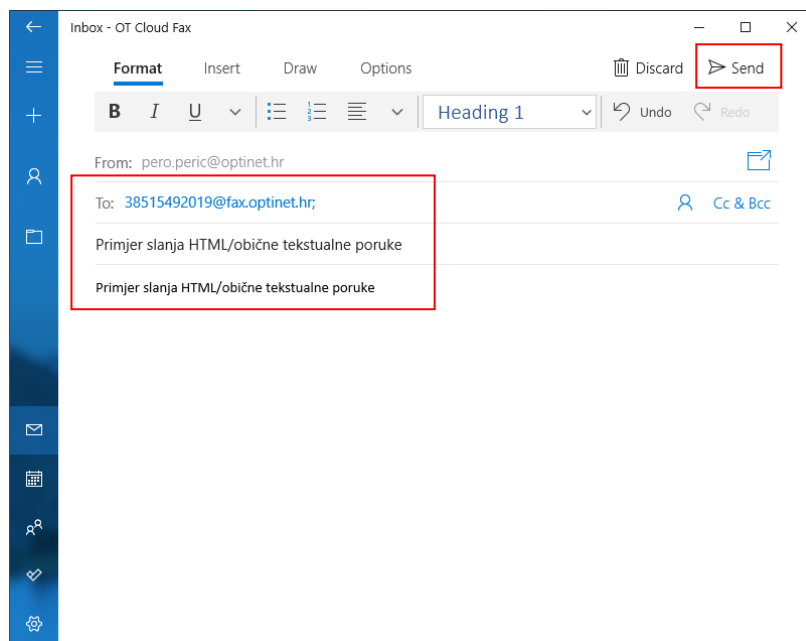


13. OT Cloud Fax uslugom možete slati i sadržaje Vaših postojećih *.pdf dokumenata. Odaberite stavku „Insert“ te stavku „Files“.

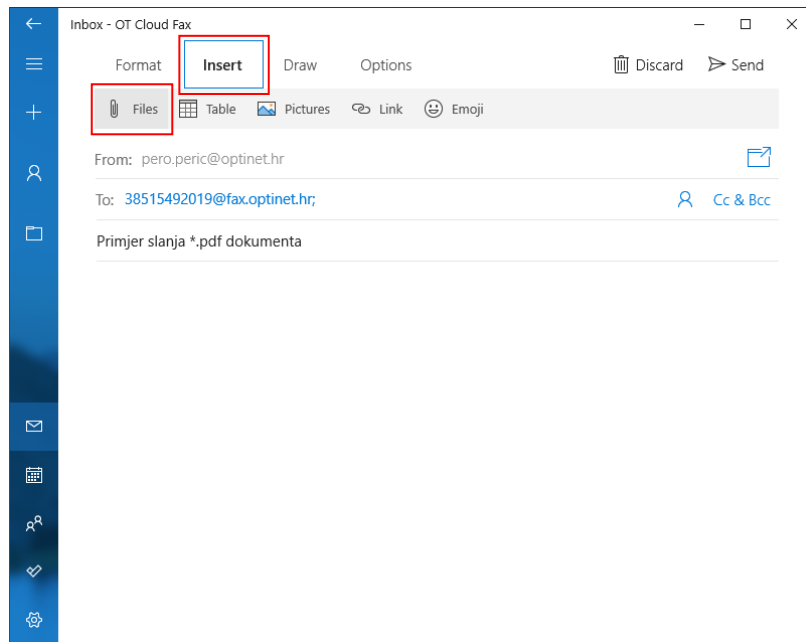

14. Odaberite željeni *.pdf dokument s Vašeg računala kojeg želite poslati OT Cloud Fax uslugom te odaberite stavku „Open“.

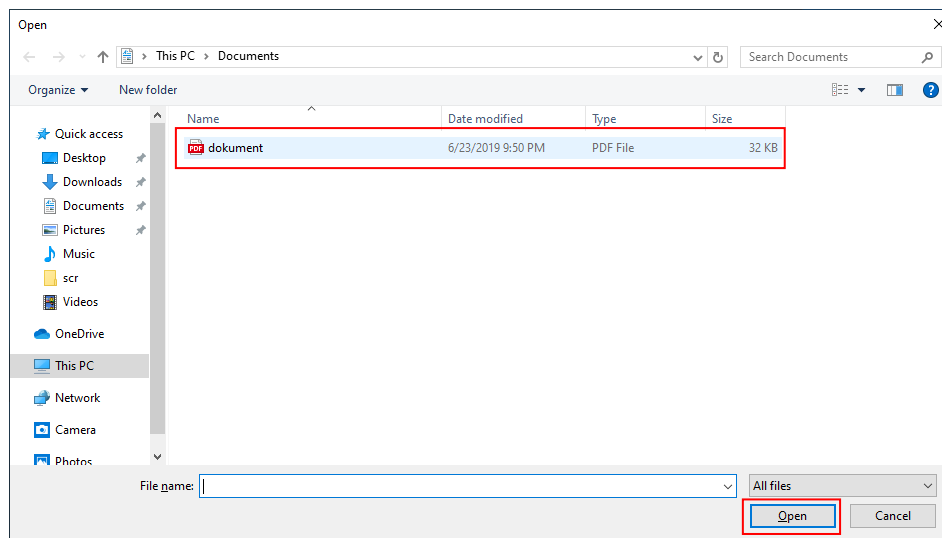

15. Za slanje OT Cloud Fax poruke, odaberite stavku „Send“.

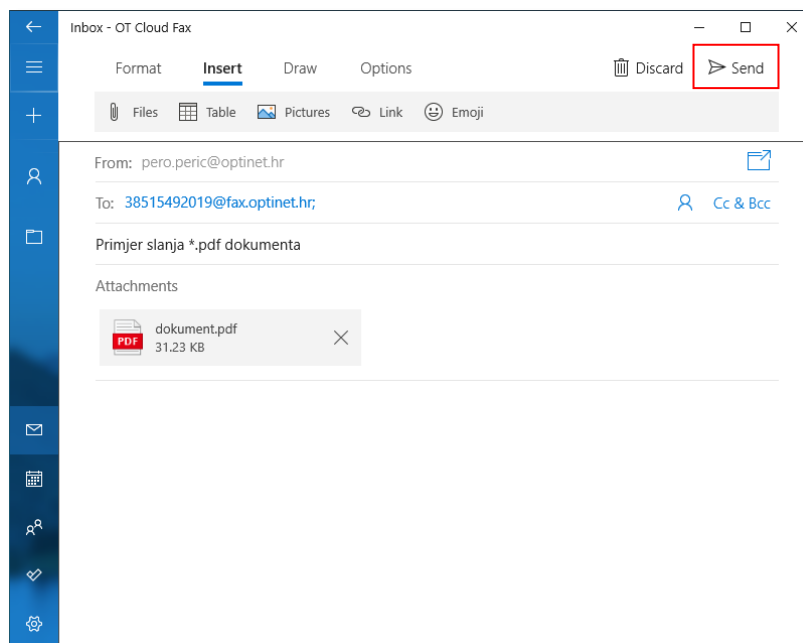

Izveštavanje o aktivnostima i eventualnim poteškoćama

OT Cloud Fax usluga omogućuje i jednostavno te pregledno izvještavanje o aktivnostima i eventualnim poteškoćama koje su se dogodile prilikom slanja i primanja fax poruka. Obavijesti o aktivnostima i poteškoćama dolazit će u obliku e-mail poruke na Vašu OT Cloud Fax e-mail adresu, a sadržavati će kratak opis aktivnosti ili poteškoće koja se dogodila.

Opise obavijesti o aktivnostima ili eventualnim poteškoćama pogledajte u nastavku...

- FAX: Neispravan format poruke (e002)
- FAX: Neuspješno slanje na (e005)
- FAX: Broj zauzet (e006)
- FAX: Neuspješno slanje na (e008)
- FAX: Uspješno dostavljen na
- FAX: Od
- FAX: Odlazni broj nije postavljen (e019)
- FAX: Uspješno zaprimljen
- FAX: Problem na sustavu (e003)
- FAX: Neispravan broj primatelja (e004)
- FAX: Neuspješno slanje na (e007)
- FAX: Usluga nije omogućena (e010)
- FAX: Slanje zabranjeno (e013)
- FAX: Usluga nije omogućena (e011)
- FAX: Usluga isključena (e012)

Kontakt:

OT - Optima Telekom d.d.
Bani 75a, Buzin
HR-10 010 ZAGREB
Besplatni telefon 0800 0088
Besplatni fax 0800 0087
www.optima.hr